




Pioneers in Sustainable Roofing Since 1993

Traditional Shake




Cedar Brown

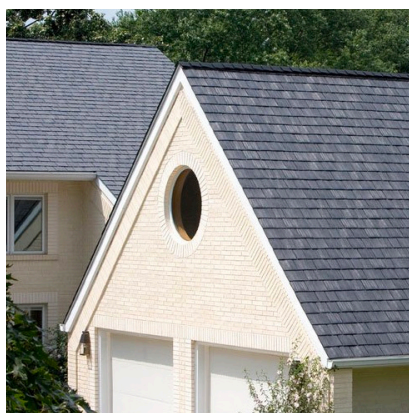

Midnight Gray



Black



Cedar Brown

Highly Sustainable | Highest Testing Performance | Proven Longevity | Uncompromised Beauty



Traditional Shake in Stone Red,
Cedar Brown and Sage Green.

Traditional Shake

EcoStar Shake roof tiles are custom crafted using real cedar shakes as a template to create an intricate texture that truly appears natural. These synthetic shake tiles are manufactured from up to 80% post-industrial recycled materials. Unlike real wood, EcoStar Shake provides superior protection from the most extreme elements such as rain, wind, hail, snow, fire, extreme temperature change and the sun's UV rays. Little-to-no maintenance combined with a 50-year warranty means a trouble-free roofing solution with lasting performance.

EcoStar Shake combines modern performance with the classic architectural detail of wood. This shake alternative offers endless possibilities for residential and commercial buildings. Our extensive color palette enhances the architectural detail of both historic and new construction projects.

Advantages

- The look of traditional cedar shake without extensive maintenance
- Easy application keeps installation costs down
- Factory pre-blended for color & width
- Designed with up to 6" headlap for installation integrity
- Significant property insurance discounts may be available when upgrading or building a roof to protect against the elements

Architectural Flexibility

- Packaged in a blend of 6", 9" and 12" widths
- Staggered and offset installations accentuate roof texture and depth

Strength & Durability

- Provides superior durability and protection from extreme weather conditions that include fire, wind, hail and wind driven rain
- 19" length provides 3" of headlap protection (Class C) and 20" length provides 2" of headlap protection (Class A) against wind-driven rain and ponding snow melt (at maximum reveal)
- Significant life cycle savings

Environmental Sustainability

- Manufactured with post-industrial recycled plastics and/or rubber (not tires)


Technical Information

- Division 7 Building Codes per UL ER18920-01 / -02
- State of Florida Evaluation Report FL 30713-R1
- Miami-Dade County, Florida NOA No. 17-1227.10 11/07/23
- Texas Dept. of Insurance Evaluation (RC-135)
- Canadian Code Compliance Evaluation (CCMC-14174-R)
- UL listed Class C or Class A fire resistance (UL 790)
- UL Class 4 (highest rating) hail impact resistance (UL 2218)
- Prolonged UV Exposure (ASTM G155)
- Resistant to algae, fungus or mold growth
- Job lot control produces uniform roof tile weathering
- ISO 9001:2015 Quality Management Standards

Warranty Options

- 50-Year Limited Material Warranty available
- 50-Year Gold Star Labor & Material Warranty available

Traditional Shake Profiles:



12", 9", 6" Blend

Fire Rating	Class C	Class A
Recycled Material	80%	25%
Tile Width	12", 9", 6"	
Profile	Solid	
Tile Thickness	3/8"	
Maximum Reveal	8" (7")	9" (8", 7")
Weight/Sq at Max. Reveal	261 lbs.	277 lbs.
Impact Rating	Class 4	
Miami-Dade	No	Yes
Standard Colors	14 (12 available as Cool Colors)	
Factory Blends	10	